

NEMO

TILE + STONE

OXIDE



OXIDE



OXIDE



# OXIDE COLORS

PORCELAIN SLAB FLOOR & WALL TILE



CORTEN  
NATURAL

OXIDE



# OXIDE

## TECHNICAL FEATURES

Type	Porcelain
Reaction to Fire	Class A1
Stain Resistance	Class 3 min.*
Water Absorption	≤ 0.2%
DCOF	> 0.42
Frost Resistant	Resistant
Bending Stregnth	≥ 35 N / mm <sup>2</sup>
Thickness	6 mm
Break Strength	≥ 700 N
Resistance to Deep Abrasion	≤ 135 mm <sup>3</sup>
Rectified	Yes

## PACKING INFORMATION

FORMAT	COLOR	FINISH	SQ.FT. PER BOX	WGT. OF BOX	PEICES IN BOX	BOXES ON PALLET	SQ.FT. PER PALLET	WGT. OF PALLET
39" X 98"	CORTEN	NATURAL	538 SQ.FT.	1752.6 LB.	20	1	538 SQ.FT.	1752.6 LB.
59" X 118"	CORTEN	NATURAL	774.7 SQ.FT.	2597 LB	16	1	774.7 SQ.FT.	2597 LB

# OXIDE

## SIZE




59" X 118"




39" X 98"

## TRIMS

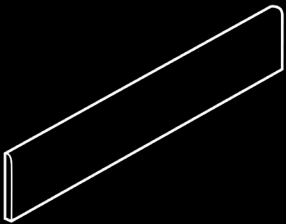

3<sup>3</sup>/<sub>4</sub>" X 39<sup>3</sup>/<sub>8</sub>" BULLNOSE

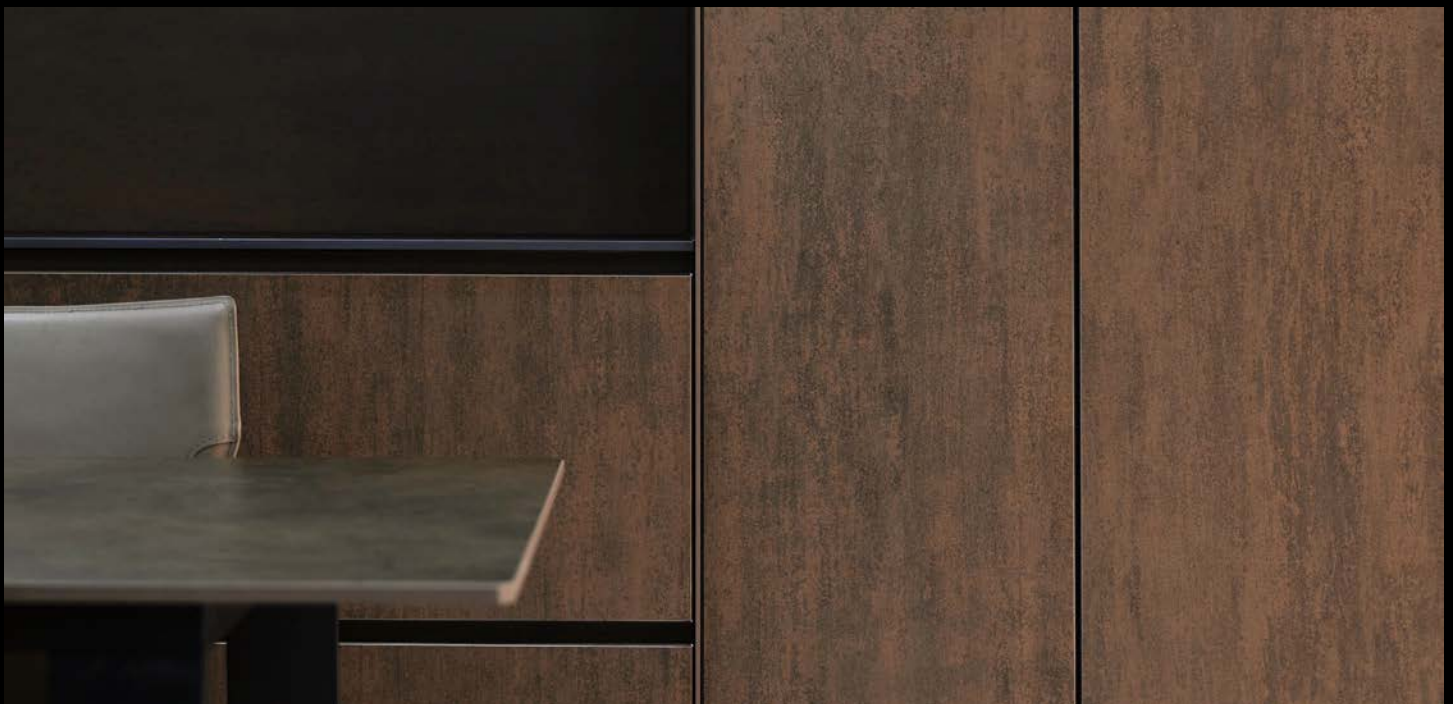



**NEMO**  
TILE + STONE  
OXIDE