


■ NEMO
TOWNE



TOWNE

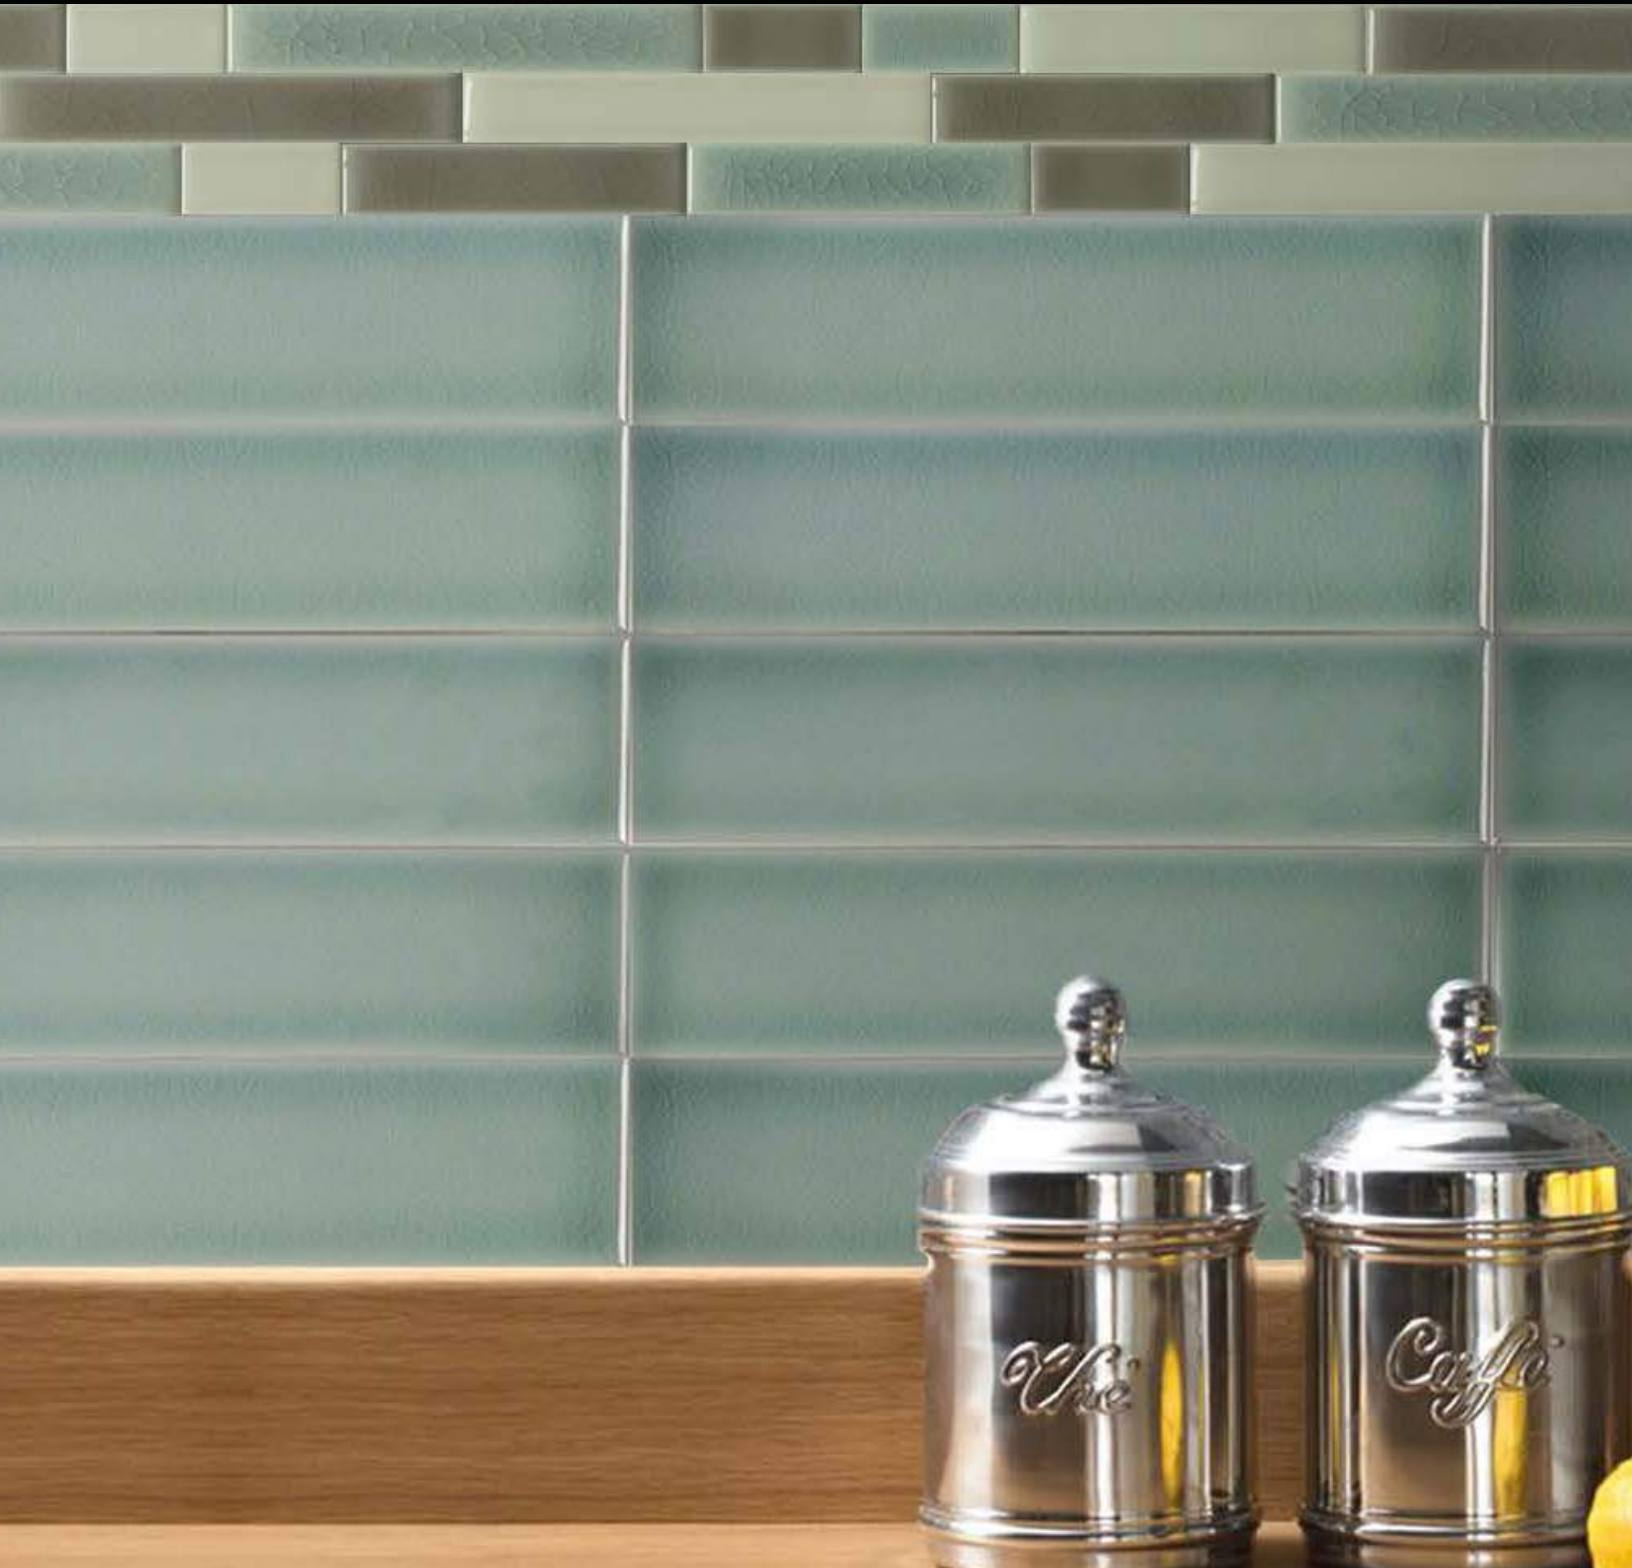


TOWNE




TOWNE

COLORS

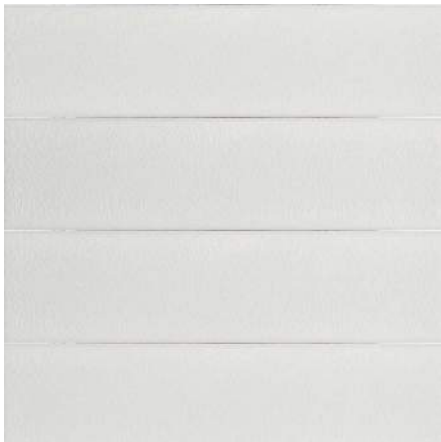

WHITE MOON*

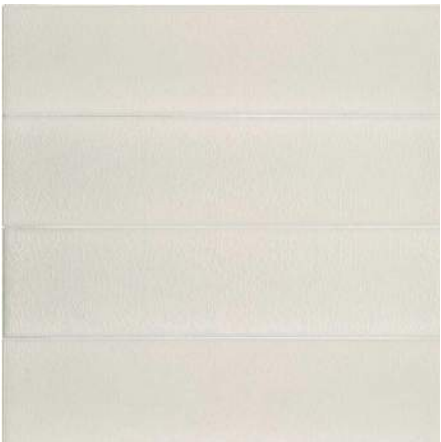

IVORY*



SILVER*




GRAY STONE*




CHARLESTON GRAY*

* Also Available in Non-Craquele Finish

TOWNE COLORS

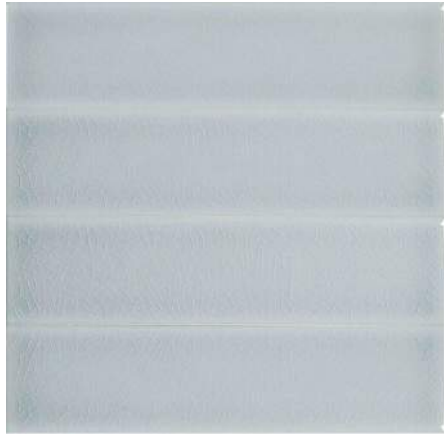


AQUA

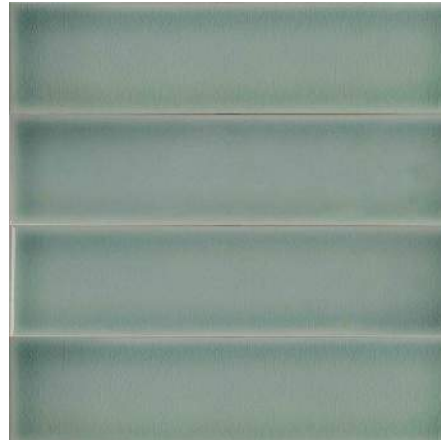

ROSEMARY



NAVY

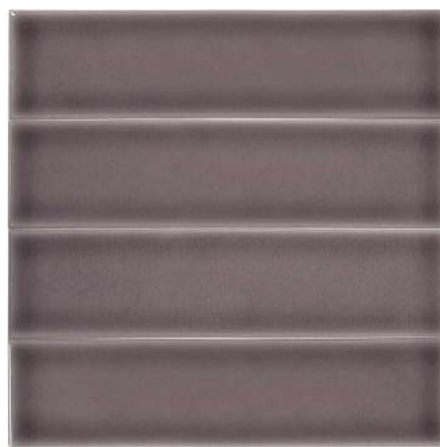


AMETHYST




OLIVE GREEN

TOWNE

SIZES & SPECS

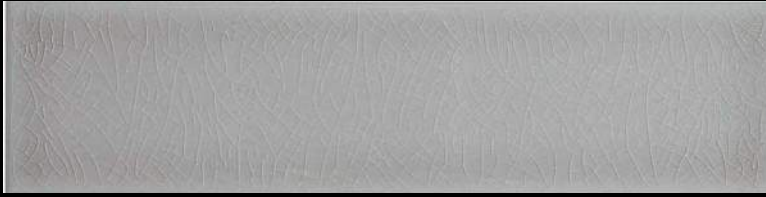

TILE - 2.5"x10" - 6.5x26cm
Ivory and white also available in 3"x6"



CHAIRRAIL - 1.5"x10" - 4x26cm
Available in all craquele colors



QUARTER ROUND - 0.5"x8" - 1x20cm
Available in all craquele and transparent colors

TECHNICAL CHARACTERISTICS

DOUBLE FIRING L - BIII GL - (E > 10%) - UNI EN 14411 - L -

SPECIFICATION	TEST METHODS	REQUIREMENTS IN ACCORDANCE TO THE STANDARDS	DOUBLE FIRING AVERAGE VALUE
Dimension and appearance	ISO 10545-2	Prospect L1	Compliant
Water absorption	ISO 10545-3	> 10%	> 10%
Flexural resistance	ISO 10545-4	$\geq 7,5$ mm min. $\geq 15N/mm^2$	17 N/mm ²
Linear expansion thermic coefficient	ISO 10545-8	Available on request	6,6 x 10 ⁻⁶
Resistance to sudden temperature changes	ISO 10545-9	Available on request	Resistant
Grazing Resistance	ISO 10545-11	Always tested	Resistant
Chemical Resistance	ISO 10545-13	Min. GB	GA
Stain Resistance <small>(In all boxes will be attached SEALING INSTRUCTIONS)</small>	ISO 10545-14	From 1 to 5 - Min. 3	5

TOWNE





 **NEMO**
NEMOTILE.COM

TOWNE