

**■ NEMO**  
**TEMPO GLASS**



# TEMPO CANTO





# TEMPO COUPLET



# TEMPO - COUPLET



COUPLET - WARM GREY



COUPLET - SOFT BLUE



COUPLET - WARM WHITE



COUPLET - SOFT GREEN



COUPLET - CASPER WHITE

# TEMPO - CANTO



CANTO - SOFT BLUE BLEND



CANTO - COOL GREY BLEND



CANTO - WARM WHITE BLEND



CANTO - SOFT GREEN BLEND



CANTO - CASPER WHITE




CANTO - WARM GREY


# TEMPO GLASS

## TECHNICAL DATA

TEMPO TECHNICAL DATA		
Characteristics	Test Method	Results
Resistance of Tile to Freeze-Thaw Cycling	ASTM C 1026	Unaffected
Scratch Hardness (Mohs)	BS 6431 Part 13:1992	5
Water Absorption	ASTM C373	Avg. 0.01
Thermal Shock on Glass Pipe	ASTM C 600	Failed
Compressive Strength of mosaic glass tile	ANSI A 137.2-2012 - Point 7.8	125
Chemical Resistance	ASTM C 650	NA
Static Coefficient of Friction	ASTM C 1028	dry:>50 / wet: 24

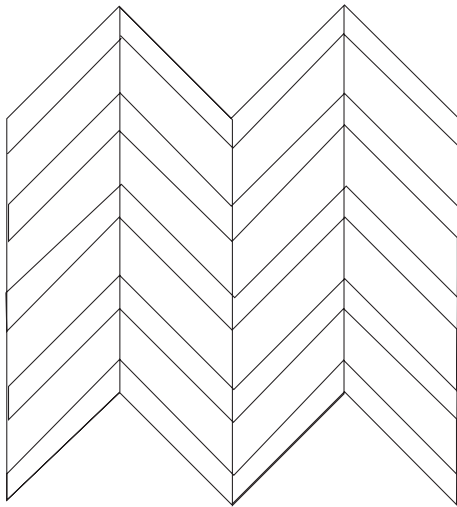

couplet mosaic on 12x12 sheet

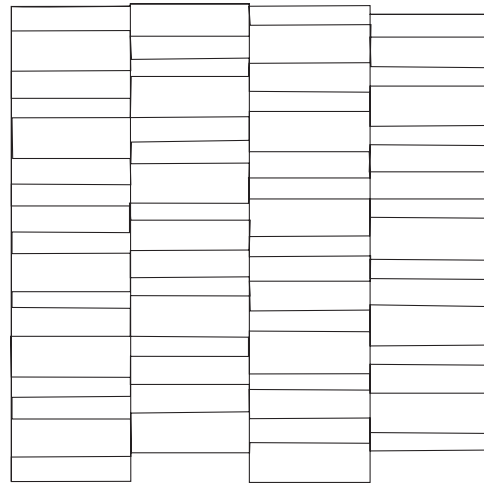

cantos mosaic on 12x12 sheet



# TEMPO - CANTO





 **NEMO**  
NEMOTILE.COM

**TEMPO GLASS**